



# TimeView® 400 UHF Display Clock

## Model TV400G



- **Perfect for Time and Attendance Systems, General Displays, and Alarms.**
- **Built-in Radio Receiver with Antenna**
- **Highly Visible LED Digits**
- **Switch-Selectable 12/24-Hour Format**
- **Accurate to 250 Milliseconds Relative to UTC**
- **Optional Event Alert Features**
- **Self-Adjusting After Power Interruption**
- **Five-Year Warranty**

The TimeView® display clock is an easy way to provide system-wide, synchronized time using a wireless solution. The Spectracom wireless clock system delivers coordinated system time to all wall displays *without hardwiring*. A wired model is also available.

A typical system installation includes the Spectracom NetClock®, a TimeBurst™ module, and TimeView wireless clocks. Unlike other systems that require multiple transmitters and antennas in close proximity to the displays, Spectracom solutions use the UHF FM government-band radio system (Model TV400G), or a pager system with audio input (depending on your requirements) to transmit accurate, synchronized time from the central communications system to any site in the operation. The TimeBurst receives time from the NetClock through an RS-485 port and connects to the radio transmitter. A user-defined schedule automatically keys the transmitter and sends a coded time-of-day digital burst.

All TimeView 400 display clock models have internal radio receivers and included external antennas. Each clock decodes the TimeBurst transmission and sets its internal clock to within 250 milliseconds of the NetClock's time.

The optional Event Alert features provide visible and audible alert systems. Commands are executed using the TimeBurst Model 8185, Option 01 for Event Alert.

The Spectracom wireless clock is easy to install, automatic, reliable, and visible up to 150 feet away.

Spectracom solutions provide Legally Traceable Time® to synchronize your critical operations. Legally traceable time stamps provide necessary evidence and validation of events to reduce liability risks.

## PERFORMANCE

**TIMING ACCURACY** ± 250 milliseconds

## RADIO RECEIVER

- FM receiver; supports standard narrow-band FM voice channels
- 6.25 KHz channel spacing
- 2.5 or 5 KHz FM deviation
- Operates on 25 or 12.5 KHz channels
- UHF (government band): 406-420 MHz (programmable)

**SENSITIVITY** -107 dBm (1 uV) typical or receiver RF input

## FRONT PANEL

### DISPLAY

- Green LED standard; 12- or 24-hour
- 4" (101 mm) hours and minutes digits
- 2.3" (58 mm) seconds digits
- Visibility to 150 feet (46 meters)
- Seconds digits blink to indicate loss of time synchronization
- Decimal point of hours digit flashes for one second when time data is received.

## REAR PANEL

**SELECTABLE FUNCTIONS** Set-up switches configure:

- Manual time set
- 12- or 24-hour display
- Brightness
- RF frequency
- RF signal strength
- Grouping
- Buzzer volume for options 01, 02, 03
- Settings retained in non-volatile memory

**OUTPUT PORT** Two RS-485 outputs three-position terminal block

- Once per-second serial time code (Format 0), 9600 baud
- Format 5 output included for event alert options
- Capable of driving wired wall clocks (TV210W/TV400W/TV312W), TimeTap® (8179T)
- Accurate to ± 75 msec (updated once per hour)

## POWER

### POWER SUPPLY

100-250 VAC, 47-63 Hz to 12 VDC @ 18 watts max. from external CE/UL/CSA approved power supply. Re-order number: PS06-0E0J-DT03 (barrel-type power connector; 5.5 mm OD, 2.5 mm ID, female, center positive)

## BATTERY BACK-UP

10-year storage/operating life lithium battery maintains internal time during power interruption.

## PHYSICAL & ENVIRONMENTAL SIZE/WEIGHT

21" L x 7.5" H x 3.4" D, 8.5 lbs (533 mm L x 191 mm H x 86 mm D, 3.9 kg)

## ENVIRONMENTAL

Operating Range: 32° to 122°F (0° to 50°C)  
Storage Range: -40° to 185°F (-40° to 85°C)  
Relative Humidity: 10–95%, non-condensing

## AGENCY APPROVALS

- UL/CSA (power supply)
- FCC Part 15 Class B

**WARRANTY** FIVE-YEAR LIMITED WARRANTY

## ORDERING INFORMATION

### TimeView® Display Clock

TimeView® 400 Display Clock - Model TV400G


**Option 01** Event Alert System: Top lights (LEDs) and internal buzzer

**Option 02** Event Alert System: Bottom lights (LEDs) and internal buzzer

**Option 03** Event Alert System: Top and bottom lights (LEDs) and internal buzzer

**Option 04** External Antenna and Connector

## TIMEVIEW 400 DISPLAY BLOCK DIAGRAM

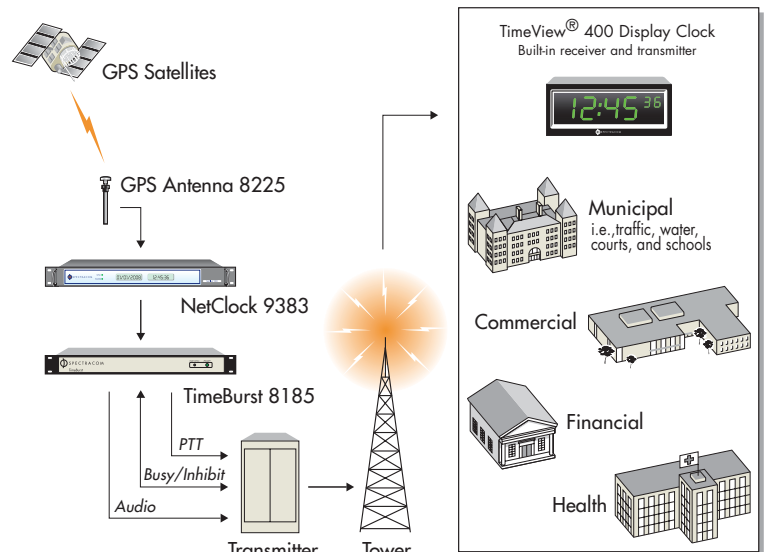

0709-400G(E)

Specifications subject to change or improvement without notice. Spectracom is a company of the Orolia Group. © 2009 Spectracom Corp.